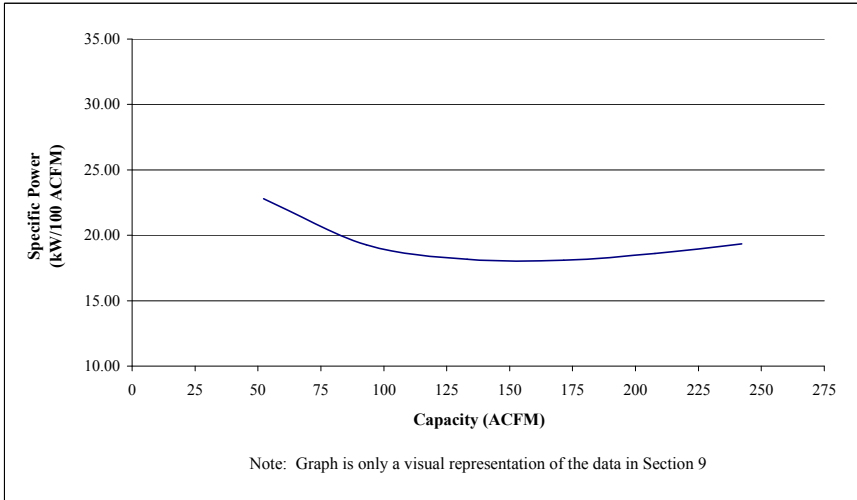


COMPRESSOR DATA SHEET

Rotary Screw Variable Frequency Drive Compressor

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: CompAir		
2	Model Number: L37RS - 100psig		Date: 5/31/10
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled <input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages:	1
3	Rated Operating Pressure	100	psig ^b
4	Drive Motor Nameplate Rating	50	hp
5	Drive Motor Nameplate Efficiency	92.4	percent
6	Fan Motor Nameplate Rating (if applicable)	1.2	hp
7	Fan Motor Nameplate Efficiency	62.8	percent
8	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	46.8	242.2	19.34
	38.7	207.8	18.60
	31.0	171.5	18.10
	24.2	133.1	18.16
	18.0	93.1	19.28
	11.9	52.2	22.80
9	Total Package Input Power at Zero Flow ^c	2.8	kW
10	 <p style="text-align: center; font-size: small;">Note: Graph is only a visual representation of the data in Section 9</p>		

- NOTES:
- Measured at the discharge terminal point of the compressor package in accordance with Annex E to ISO 1217; acfm is actual cubic feet per minute at inlet conditions.
 - The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
 - No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
 - Tolerance is specified in Annex E to ISO 1217 as follows:
NOTE: The terms "power" and "energy" are synonymous for purposes of this document

Member:



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy
<u>m³ / min</u>	<u>ft³ / min</u>	%	%
Below 0.5	Below 15	+/- 7	+/- 8
0.5 to 1.5	15 to 50	+/- 6	+/- 7
1.5 to 15	50 to 500	+/- 5	+/- 6
Above 15	Above 500	+/- 4	+/- 5